US 20200346710A1

(19) **United States**

(12) **Patent Application Publication**

KOMATSU et al.

(10) **Pub. No.: US 2020/0346710 A1**

(43) **Pub. Date: Nov. 5, 2020**

(54) **BICYCLE OPERATING DEVICE**

(71) Applicant: **SHIMANO INC.**, Sakai City (JP)

(72) Inventors: **Atsushi KOMATSU**, Sakai City (JP); **Takehiko NAKAJIMA**, Sakai City (JP); **Takafumi NISHINO**, Sakai City (JP)

←小松　厚志氏（XTR　Di2の特許出願書にも名前がある）

(73) Assignee: **SHIMANO INC.**, Sakai City (JP)

(21) Appl. No.: **16/935,192**

(22) Filed: **Jul. 22, 2020**

Related U.S. Application Data

(63) Continuation of application No. 15/135,481, filed on Apr. 21, 2016, now Pat. No. 10,759,489.

Publication Classification

(51) **Int. Cl.**

B62K 23/06 (2006.01)

B62L 3/02 (2006.01)

(52) **U.S. Cl.**

CPC ***B62K 23/06*** (2013.01); ***B62L 3/023*** (2013.01); ***B62L 3/02*** (2013.01)

(57) **ABSTRACT**

A bicycle operating device comprises a base member, a brake operating member, an additional operating member, an electrical switch, and a wireless communication unit. The brake operating member is movably coupled to the base member. The additional operating member is movably coupled to the brake operating member. The electrical switch is to provide an electric signal in response to a movement of the additional operating member. The electrical switch is disposed at the additional operating member. ※1The wireless communication unit is connected to the elec-trical switch to transmit a wireless signal based on the electric signal. ※2 The wireless communication unit is disposed at one of the base member and the brake operating member.

※1訳　無線通信ユニットは、電気スイッチに接続され、電気信号に基づいて無線信号を送信する。
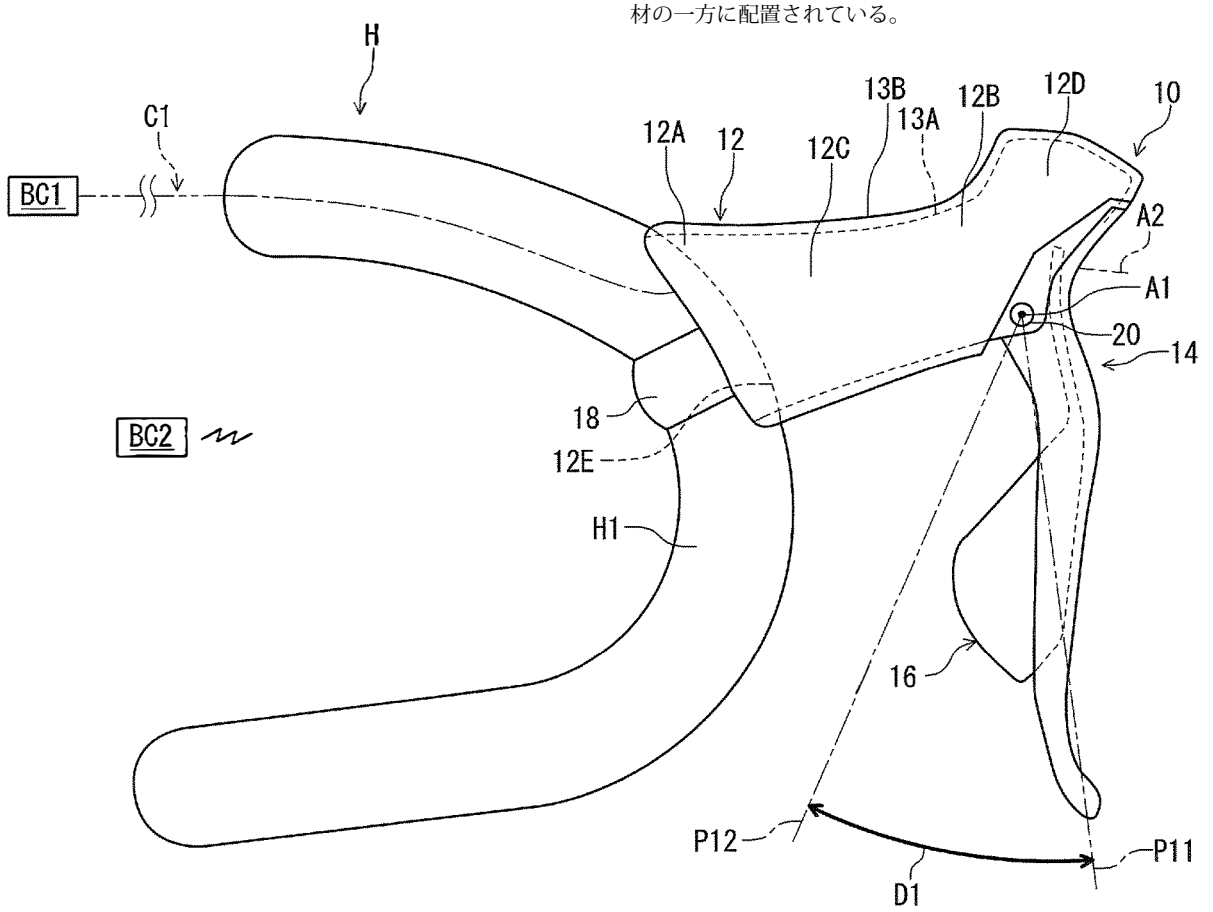
※2訳　無線通信ユニットは、ベース部材とブレーキ操作部材の一方に配置されている。